



**THERMOPLASTIC
VALVES INC.**
COMPACT BALL VALVE

53 S. 7th Street, Emmaus, PA 18049
Ph: 610-967-6388 Fax: 610-967-6448

Email: tvi2@fast.net
www.plasticvalves.com

SIZE: 6"


DWN BY
CKP

DATE
12-2013

DWG NO.
110-CB

CERTIFIED CORRECT FOFR GENERAL DIMENSIONS

DATE _____ PER: _____

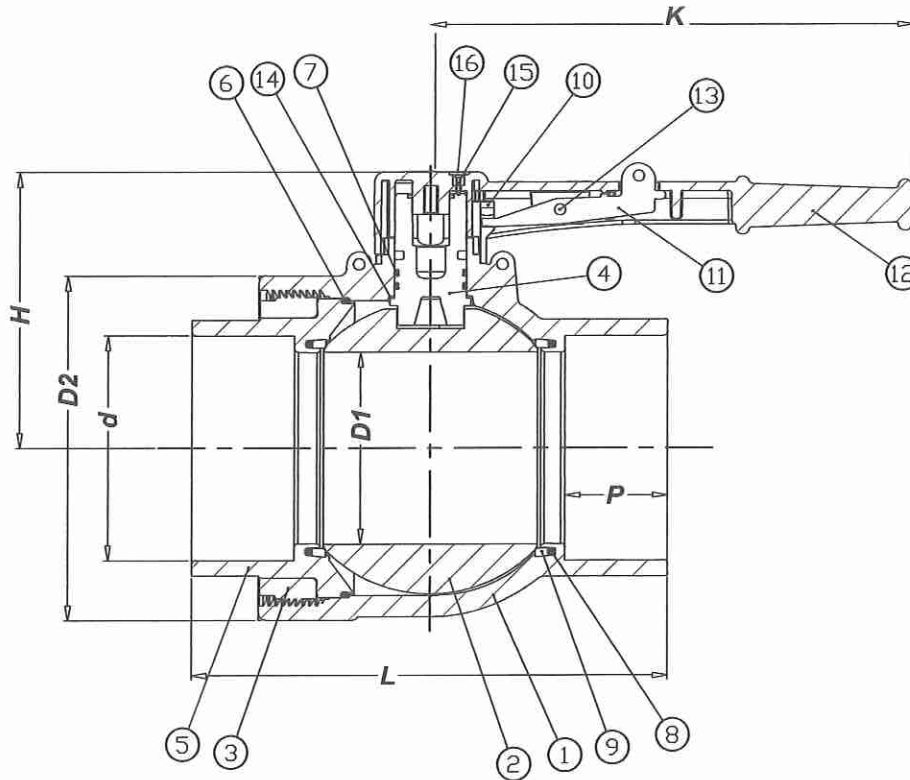

Material Of Construction

Item	Parts	Pcs	Materials	Item	Parts	Pcs	Materials
1	Body	1	UPVC	9	Seat	2	PTFE
2	Ball	1	UPVC	10	Activities Jumper	1	UPVC
3	Seat Carrier	1	UPVC	11	Handle Lever	1	PP
4	Stem	1	UPVC	12	Handle	1	PP
5	End Connector	1	UPVC	13	Jumper	1	PP
6	Seat Carrier O'ring	1	EPDM	14	Washer	1	PP
7	Stem O'ring	2	EPDM	15	Bolt	1	SUS 304
8	Body O'ring	2	EPDM	16	Cap	1	PP

Ansi Dimensions

Size Inches	D1	d socket	d thread	P	L	K	H	Test Pressure	Working Pressure
6"	5.9	6.65	5.9	3.03	14.04	14.23	8.15	225	150

Testing Procedure: Every valve is tested for bubble tight shutoff prior to leaving the factory.
Pressure testing preformed on PVC/EPDM valves at 73° water temperature, non-shock.

TVI COMPACT BALL VALVE (6")

DESIGN ADVANTAGES

Economically priced
Light weight & maintenance-free makes for an easy installation
Durable construction, low torque with self lubricating Teflon® seat
Body Ccnstruction - light Weight, chemical resistant, non-corrosive

APPLICATIONS

Water and Waste Treatment
Chemical Industry
Environmental Industry
Process Industy
Systems Engineering

DESIGN SPECIFICATIONS

Thermoplastic compact ball valve (6") shall have a one piece PVC molded body with socket or threaded end connections. Valve is full port for lowest possible pressure loss. Seat shall be comprised of Teflon® and seal of EPDM. Every valve is fully pressure and cycle tested to insure quality. Valve shall have a one piece self centering ball and stem design for leak tight operation. Material of construction shall be as follows:

BODY, BALL & STEM

PVC, ASTM D-1784

SEAT

PTFE (Polytetrafluoroethylene), Teflon® (Dupont Dow Elastomers)

SEALS (o'rings)

EPDM, Ethylene Propylene Diene Monomer

MANUAL LEVER

ABS D-1788

End connectors shall conform to the following standards:

SOCKET

ASTM-D2467 (PVC, SCH-80)

THREADED

ASTM-D2464 (PVC, SCH-80)